



PROFESSIONAL  
THINKING

# PRODUCT SHEET EKF 464 D

TECNOEKA SRL - VIA MARCO POLO, 11 - 35010 BORGORICCO - PADOVA - ITALY - TEL. +39 049 5791479 +39 049 9300344 - FAX +39 049 5794387 - E-MAIL: INFO@TECNOEKA.COM - WWW.TECNOEKA.COM - WWW.TECNOEKA.RU

## EKF 464 D – DIGITAL ELECTRIC CONVECTION OVEN WITH HUMIDIFICATION 4 TRAYS/GRIDS (600x400 mm)

EKA EVOLUTION LINE




BAKING



This is the ideal tool for those small food outlets who need to bake cakes and croissants easily and with intuitive programming.

With the electronic control panel, which has 99 programs, you can cook in 4 stages and produce your favourite recipes with shorter cooking times, getting results that will wow your customers.

Your specialties will be a treat for the eyes and the taste buds thanks to the button-operated humidity control feature, which allows you to customize how you bake each dish.

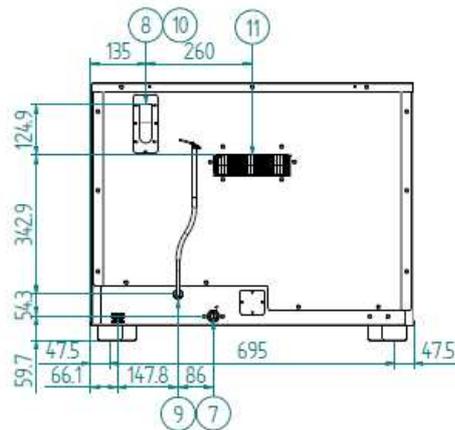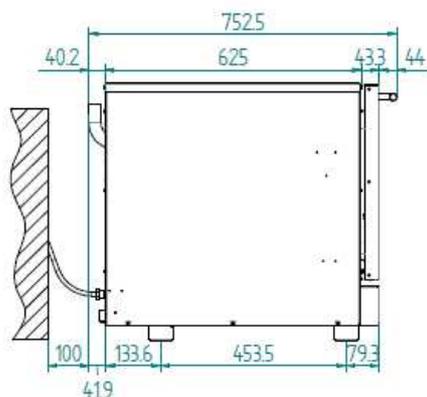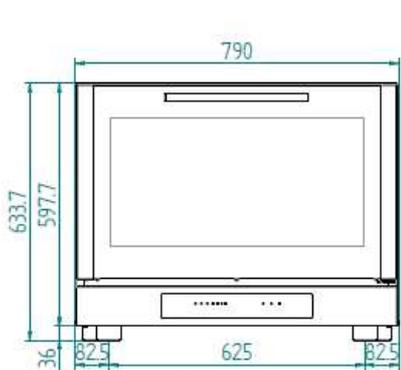

LEGEND

1	USB PORT	11	DON'T CLOG UP VENTILATION OPENINGS
2	SERIAL PORT	12	WATER INLET MAX. 200 kPa
3	PLUG FOR CORE PROBE	13	SOFTENED WATER INLET MAX 200 kPa
4	WATER OUTLET TUBE	14	BOILER CLEANING INLET
5	WASHING WATER INLET	15	DON'T OPEN CAP WHILE WORKING
6	SOFTENED WATER INLET	16	GAS INLET THREADED JOINT 3/4"
7	WATER INLET	17	POWER SUPPLY TO TOP OVEN
8	STEAM OUTLET	18	PRE-CARVED HOLE FOR BOTTOM OVEN POWER SUPPLY
9	ELECTRIC CABLE FIXER	19	STEAM SUCTION PIPE
10	CAUTION! HOT SURFACE		



DIMENSIONAL FEATURES				FUNCTIONAL FEATURES				
<b>DIMENSIONS</b>	<b>W</b>	<b>D</b>	<b>H</b>	POWER	ELECTRICITY			
OVEN DIMENSIONS (mm)	790	750	635	CAPACITY	N° 4 TRAYS/GRIDS (600x400 mm)			
CARDBOARD BOX DIMENSIONS WITH PALLET (mm)	805	830	800	TYPE OF COOKING	VENTILATED			
OVEN DIMENSIONS (inches)	31,10	29,52	25	HUMIDIFICATION (see legend)	INDIRECT WITH BUTTON			
CARDBOARD BOX DIMENSIONS WITH PALLET (inches)	31,69	32,67	31,49	COOKING CHAMBER	AISI 430 STAINLESS STEEL			
OVEN WEIGHT (kg)	50,6			WATER OUTLET	/			
PACKED OVEN WEIGHT (kg)	60,8			STEAM OUTLET	DIRECT			
OVEN WEIGHT (lbs)	111,55			TEMPERATURE	50 ÷ 270°C			
PACKED OVEN WEIGHT (lbs)	134,04			TEMPERATURE CONTROL	DIGITAL PROBE THERMOMETER			
DISTANCE BETWEEN RACK RAILS (mm)	83			CONTROL PANEL	DIGITAL – LOWER SIDE			
FAN DIMENSION (mm)	Ø 150 - NR. 6 BLADES			N° OF PROGRAMS	99			
CENTER-TO-CENTER DISTANCE BETWEEN RUBBER FEET (mm)	625 (FRONT) – 695 (BACK)			PROGRAMMABLE COOKING STEPS	4			
<b>ELECTRICAL FEATURES</b>				PRE-HEATING TEMPERATURE	180°C			
				PRE-HEATING FUNCTION	AVAILABLE ONLY IN "PROGRAM MODE"			
POWER SUPPLY (kW)	3,4			DOOR	TILT DOOR			
FREQUENCY (Hz)	50/60				VENTILATED			
VOLTAGE (Volt)	AC 220/230				INSPECTIONABLE GLASS			
N° OF MOTORS	2 UNIDIRECTIONAL			MODULARITY	YES			
RPM	2250			RUBBER FEET	NOT ADJUSTABLE			
N° OF RESISTORS				<b>EQUIPMENT</b>				
				CIRC.	2 pcs	1,6 kW	LATERAL SUPPORTS	1 RIGHT + 1 LEFT
				TOP+GRILL	/	/	CABLE	SINGLE-PHASE [3G 1,5] - L=1350 mm
BOILER	/							
LIMIT CONTROL	UNIPOLAR WITH MANUAL RESET			<b>OPTIONAL</b>				
PROTECTION AGAINST WATER	IPX3			ALUMINIUM TRAY (600x400x20 mm)	COD. KT9P/A			
LIGHTING	NR.2 INCANDESCENT LIGHT BULB (IN THE COOKING CHAMBER)			PERFORATED ALUMINIUM TRAY (600x400x20 mm)	COD. KTF8P/A			
<b>PLUS</b>				5 LANES PERFORATED ALUMINIUM TRAY(600x400x20 mm)	COD. KTF9P			
STAINLESS STEEL COOKING CHAMBER				CHROMED GRID (600x400 mm)	COD. KG9P			
DOOR WITH INSPECTIONABLE GLASS				5 LANES AISI 304 CHROMED GRID (600x400 mm)	COD. KG5CPX			
QUICK FASTENING OF LATERAL SUPPORTS				TABLE	COD. EKT 411 – COD. EKTR 411 – COD. EKTS 411 – COD. EKTRS 411 – COD. EKT 411 D			
EMBEDDED GASKET				PROOFER	COD. EKL 864 – COD. EKL 864 R			
STACKABLE								
FORCED COOLING SYSTEM OF INNER PARTS								
IPX 3								
NEW DESIGN OF COOKING CHAMBER								
CB CERTIFICATION								
NEW DESIGN OF HANDLE								

LEGEND

**HUMIDIFICATION**



Water is filled in a drip box behind the air conveyor grid.  
Sort of activation: with button or with knob.  
Ideal for recipes that need humidity (for example roast meat).